

NovaBlade™ Return Air

LL9P366URA Series LED Panels



NovaBlade Return Air Fixtures Features at a Glance

- Range: 3300Lm, 30W
- Up to 110Lm/W
- UGR<19 using NEW micro prismatic diffuser
- Projected Lifetime L80B10: 74,518 hours
- Colour Temperatures: 4000K and 6000K
- Beam angle 120°
- 1-10V dimming capability as standard
- Colour rendering CRI > 90
- Powder coat white frame
- IP40 Protection rating
- Thin and light weight
- Immune to Ripple Frequency Interference
- 1.2m Flex and Plug fitted
- Fully recyclable
- Fully Australian Approved
- Seven Year Warranty



Dimming and Control

NovaBlade 3.0 products are 1-10V dimmable as standard. DALI and Casambi dimming optional.

Better control your powered environment and minimise energy costs using the AUDACY advanced wireless control system or CASAMBI. Contact LUMEX for further information.

Ripple Frequency Interference


NovaBlade 3.0 products are immune to ripple frequency interference.

Unrivalled Efficiency

NovaBlade 3.0 products utilise the latest developments in LED and offer among the highest energy to light conversions currently available - up to 110Lm/W.

Environment and Safety

NovaBlade 3.0 products are fully recyclable with no glass to break, no dangerous chemicals, and no risk from exposed voltages.

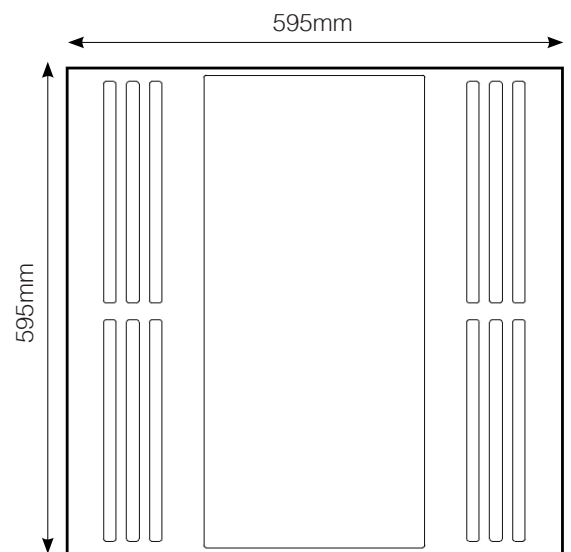

Catalogue Number Guide: NovaBlade Return Air Fixtures

Example: NovaBlade Return Air Fixtures, 595mm x 595mm, Beam angle 120°, UGR<19, Air Return, 4000K, 3300Lm **LL9P366URAN**

Product Group		Group Designation		Dimming		Panel Size		Colour Temperature	
Light Sources	LL9	NovaBlade Generation 3	P3	1-10V		595 x 595 UGR<19 with Air Return	66URA	Natural White (4000K)	N
				DALI	DD			Cool White (6000K)	C
				CASAMBI	CS				



CUSTOMER SERVICE

1300 897 287

skslighting.com.au



NovaBlade™ Return Air

LL9P366URA Series LED Panels



Physical

Frame Length:	595mm
Frame Width:	595mm
Height:	10mm
Weight:	3.6kg (9.8kg with frame)
Area of illumination:	545mm x 245mm

Control and Programming

Dimming:	1-10V standard
----------	----------------

Construction

Colour:	White
Body:	Aluminium
Protection Rating:	IP40

Connection

Power Connection:	Flex and plug
-------------------	---------------

Output

Luminous Flux 4000K:	3300Lm
Efficacy:	up to 110Lm/W
Beam Angle:	120°
CRI:	>90

Electrical

Input Voltage:	220-240 Vac
Typical Total Power:	30W
Power Factor:	0.90

Thermal

Cooling:	Convection, Conduction
Storage Temperature:	-30°C to +65°C
Operating Range Ta:	-20°C to +50°C
Humidity (non-condensing):	0-95%

Certificates

EMC:	AS/NZS CISPR15 (C-Tick)
Electrical Safety:	AS/NZS 60598.2.1, AS/NZS 4417 (RCM)

Specifications subject to change without notice.



CUSTOMER SERVICE
1300 897 287
skslighting.com.au

