

## Jupiter Square Downlight

### Specifications

#### Output

|                      |                          |
|----------------------|--------------------------|
| <b>Luminous Flux</b> | Up to 610Lm (12W)        |
| <b>Efficacy</b>      | 50(±5)Lm/W               |
| <b>CCT</b>           | 3000K, 4000K             |
| <b>CRI</b>           | Ra90                     |
| <b>Beam Angle</b>    | 50°                      |
| <b>Life Time</b>     | >50,000Hrs (Ta=30°C@L70) |

#### Electrical

|                      |         |
|----------------------|---------|
| <b>Input Voltage</b> | 240 VAC |
| <b>Power Factor</b>  | ≥0.9    |
| <b>Frequency</b>     | 50 Hz   |

#### Construction

|                          |                      |
|--------------------------|----------------------|
| <b>Product Dimension</b> | 112mm x 121mm        |
| <b>Cutout</b>            | 106mm x 106mm        |
| <b>Fixture Color</b>     | White, Silver, Black |
| <b>IP Rating</b>         | IP20                 |
| <b>Mounting</b>          | Recessed             |
| <b>Rotation</b>          | Fixed                |

#### Control



|                 |                                    |
|-----------------|------------------------------------|
| <b>Dimmable</b> | Various Dimming Profiles Available |
|-----------------|------------------------------------|

#### Thermal

|                              |                 |
|------------------------------|-----------------|
| <b>Operating Temperature</b> | -20°C to + 40°C |
|------------------------------|-----------------|

#### Warranty

|              |   |
|--------------|---|
| <b>Years</b> | 5 |
|--------------|---|

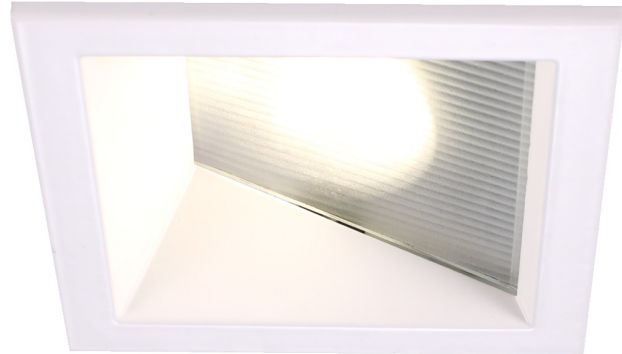

### Catalogue Number Guide: Forlite VUE Jupiter Square Downlight

|                      |                          |                |                   |                   |                           |                       |                   |
|----------------------|--------------------------|----------------|-------------------|-------------------|---------------------------|-----------------------|-------------------|
| <b>FV</b>            | <b>JS</b>                | <b>5</b>       | <b>D1</b>         | <b>50</b>         | <b>4</b>                  | <b>W</b>              | <b>R</b>          |
| <b>Product Group</b> | <b>Group Destination</b> | <b>Wattage</b> | <b>Dimmable</b>   | <b>Beam Angle</b> | <b>Colour Temperature</b> | <b>Fixture Colour</b> | <b>Mounting</b>   |
| <b>FV</b> Vue        | <b>JS</b> Jupiter Square | <b>5</b> 5W    | <b>D1</b> 1-10V   | <b>50</b> 50°     | <b>4</b> 4000K            | <b>W</b> White        | <b>R</b> Recessed |
|                      |                          | <b>8</b> 8W    | <b>DD</b> DALI    |                   | <b>3</b> 3000K            | <b>S</b> Silver       |                   |
|                      |                          | <b>10</b> 10W  | <b>D0</b> Non Dim |                   |                           | <b>B</b> Black        |                   |
|                      |                          | <b>12</b> 12W  | <b>CS</b> Casambi |                   |                           |                       |                   |
|                      |                          | <b>15</b> 15W  |                   |                   |                           |                       |                   |

**CASAMBI**