

Cardan Twin Downlight

Specifications

Output

Luminous Flux	1670Lm (2 x 12W)
Efficacy	70(±5)Lm/W
CCT	3000K, 4000K
CRI	Ra90
Beam Angle	15°, 25°, 40°
Life Time	>50,000Hrs (Ta=30°C@L70)

Electrical

Input Voltage	240 VAC
Power Factor	≥0.9
Frequency	50 Hz

Construction

Product Dimension	203mm x 113mm x 110mm
Cutout	193mm x 106mm
Fixture Color	White, Silver, Black
IP Rating	IP20
Mounting	Recessed
Rotation	Adjustable

Control


Dimmable	Various Dimming Profiles Available
-----------------	------------------------------------

Thermal

Operating Temperature	-20°C to + 40°C
------------------------------	-----------------

Warranty

Years	5
--------------	---

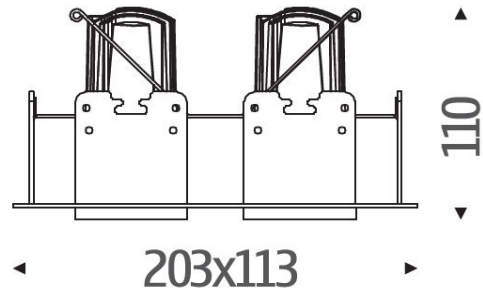

Catalogue Number Guide: Forlite VUE Cardan Twin Downlight

FV	Ct	5	D1	15	4	W	W	R
Product Group	Group Destination	Wattage	Dimmable	Beam Angle	Colour Temperature	Fixture Colour	Fixture Colour (Trim)	Mounting
FV Vue	CS Cardan Twin	5 2 x 5W 8 2 x 8W 10 2 x 10W 12 2 x 12W 15 2 x 15W	D1 1-10V DD DALI D0 Non Dim CS Casambi	15 15° 25 25° 40 40°	4 4000K 3 3000K	W White S Silver B Black	W White S Silver B Black	R Recessed

CASAMBI