

# LIGNE 2310T



## Linear Micro Extrusion

### Specifications

#### Output

<b>Luminous Flux/m</b>	Up to 2,500Lm
<b>CCT</b>	Various CCT's available
<b>CRI</b>	Ra80 or Ra90
<b>Beam Angle</b>	110°
<b>Life Time</b>	>50,000Hrs (Ta=30°C@L70)

#### Electrical

<b>Input Voltage</b>	24VDC
----------------------	-------

#### Construction

<b>Product Dimension</b>	23mm x 10mm
<b>Housing</b>	Aluminium
<b>Optics</b>	Frosted, Clear or Milky
<b>Finish</b>	Aluminium, Black or White, Custom colours available
<b>IP Rating</b>	IP20
<b>Mounting</b>	Recessed

#### Control


<b>Dimmable</b>	Various Dimming Profiles Available
-----------------	------------------------------------

#### Thermal

<b>Operating Temperature</b>	-20°C to + 40°C
------------------------------	-----------------

#### Warranty

<b>Years</b>	5
--------------	---

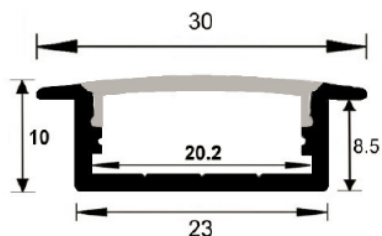

**Catalogue Number Guide:** FLM2310T

Refer to Forlite sales consultant for customised options

**CASAMBI**



**A** 53 Stanley Street, West Melbourne Victoria 3003  
**P** 1300 897 287  
**E** [lightingsales@sk.com.au](mailto:lightingsales@sk.com.au)

**SKSLIGHTING.COM.AU**

ABN 17 006 659 294  
ASX: ENE



SKS Lighting reserve the right to change specifications without notice.