

Slim Track Light

Specifications

Output

Luminous Flux	900Lm (10W)
Efficacy	90(±5)Lm/W
CCT	3000K or 4000K
CRI	Ra90
Beam Angle	20°, 30°, 40°
Life Time	>50,000Hrs (Ta=30°C@L70)

Electrical

Input Voltage	240 VAC
Power Factor	≥0.9
Frequency	50 Hz

Construction

Product Dimension	Track Mounted: 45mm x 140mm Surface Mounted: 45mm x 220mm
Housing	Aluminium
Optics	PMMA Optical Lens
Finish	Powder Coated
Fixture Colour	White, Black, Silver
IP Rating	IP20
Mounting	Track, Surface or Pendant

Control




Dimmable	Various Dimming Profiles Available
-----------------	------------------------------------

Thermal

Operating Temperature	-20°C to + 40°C
------------------------------	-----------------

Warranty

Years	5
--------------	---

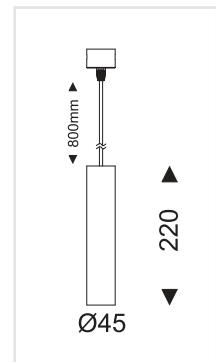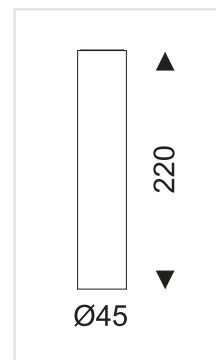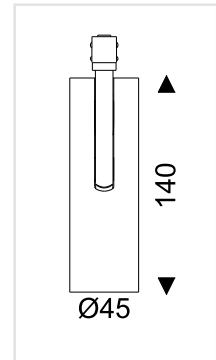

Catalogue Number Guide: Forlite TESO Slim Track Light

FT	S	10	D1	20	4	W	W	T
Product Group	Group Destination	Wattage	Dimmable	Beam Angle	Colour Temperature	Fixture Colour (Outer)	Fixture Colour (Inner)	Mounting
FT Teso	S Slim	10 10W	D1 1-10V DD DALI D0 Non Dim CS Casambi	20 20° 30 30° 40 40°	4 4000K 3 3000K	W White S Silver B Black	W White S Silver B Black G Gold	T Track SM Surface P Pendant

CASAMBI