

NovaLED Maxi

LL1N3M8 Series LED Downlight



NovaLED Maxi Features at a Glance

- Range: 4950Lm to 6050Lm, 45W and 55W
- Up to 110Lm/W
- LM80 projected LED life > 100,000 hours
- Colour Temperature 4000K
- Clear diffuser, Beam angle 90°
- Colour rendering: CRI > 90
- Cyanosis Observation Index < 3.3 at 4000K
- White finish as standard
- IP44 Protection rating
- 1.2m flex and plug fitted
- 1-10V dimming capability as standard
- Immune to Ripple Frequency Interference
- Fully recyclable
- Fully Australian Approved
- Five Year Warranty

Dimming and Control

NovaLED Maxi products are 1-10V dimmable as standard. DALI dimming optional.

Better control your powered environment and minimise energy costs using the AUDACY advanced wireless control system. Contact LUMEX for further information.

Ripple Frequency Interference


NovaLED Maxi products are immune to ripple frequency interference.

Unrivalled Efficiency

NovaLED Maxi products utilise the latest developments in LED and offer among the highest energy to light conversions currently available - up to 110Lm/W.

Environment and Safety

NovaLED Maxi products are fully recyclable with no glass to break, no dangerous chemicals, and no risk from exposed voltages.

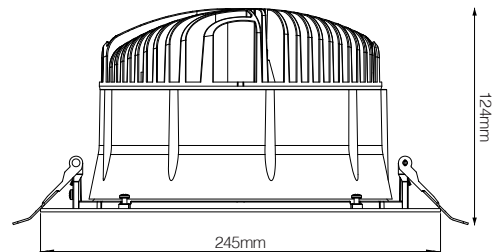

Catalogue Number Guide: NovaLED Maxi

Example: NovaLED Maxi M8 Downlight, 210mm cutout, 1-10V Dimmable, 90° beam angle, 4000K, White Fixture, 4950Lm **LL1N3M8D1CNW**

Product Group	Group Designation	Dimmable	Beam Angle	Diffuser	Colour Temperature	Fixture Colour						
Downlights	LL1	NovaLED Maxi M8	N3M8	1-10V	D1	90°	Clear	C	Natural White (4000K)	N	White	W
		NovaLED Maxi M8 High Output	N3M8H	DALI	DD							



A 53 Stanley Street, West Melbourne Victoria 3003
 P 1300 897 287
 E lightingsales@skslighting.com.au

SKSLIGHTING.COM.AU

SKS Lighting reserve the right to change specifications without notice.

ABN 17 006 659 294
 ASX: ENE



FS865083

NovaLED Maxi

LL1N3M8 Series LED Downlight



Physical

Installation Depth:	122mm
Maximum Protrusion from mounting surface:	2mm
Frame Diameter:	245mm
Diameter of luminous opening at widest point:	186mm
Cutout Size:	210mm
Weight with driver:	1.681kg

Control and Programming

Dimming:	1-10V
----------	-------

Construction

Colour:	White
Body:	Aluminium
Protection Rating:	IP44

Connection

Power Connection:	Flex and plug or direct connection
-------------------	------------------------------------

Output

Luminous Flux 45W:	4950Lm
Luminous Flux 55W:	6050Lm
Efficacy:	up to 110Lm/W
Beam Angle:	90°
CRI:	>90

Electrical

Input Voltage:	220-240 Vac
Typical Total Power:	45W and 55W
Power Factor:	0.95

Thermal

Operating Range Tc:	-20°C to +45°C
Humidity (non-condensing):	0-95%

Certificates

EMC:	AS/NZS CISPR15 (C-Tick)
Electrical Safety:	AS/NZS 60598.2.2, AS/NZS 4417 (RCM)

Specifications subject to change without notice.



A 53 Stanley Street, West Melbourne Victoria 3003
P 1300 897 287
E lightingsales@skslighting.com.au

SKSLIGHTING.COM.AU

SKS Lighting reserve the right to change specifications without notice.

ABN 17 006 659 294
ASX: ENE



FS665083